
CARTONING MACHINERY

15D105 Hand Load Cartoner





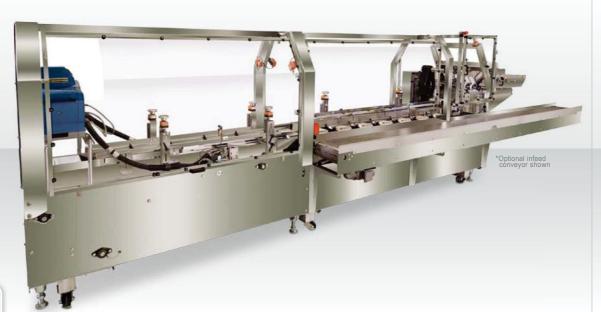

where products meet packaging^m

There is a reason the 15D105 is one of the most recognized cartoners among packagers. Capable of forming a wide range of carton sizes and styles at speeds up to 125 cartons per minute, the affordable 15D105 is ideal for the most demanding and cost conscious production environments. The 15D105 features continuous motion design, delivering smooth, efficient and reliable operation all day, every day. Designed for easy conversion to a fully automatic barrel cam machine, you can rest assured that as your production needs change the 15D105 can change with you. Fast changeover, simple operation and excellent ergonomics, all hallmarks of the 15D105, make this machine an incredibly popular choice. Like all ADCO machines, the 15D105 is constructed in stainless steel and is available in standard or washdown configurations.

Benefits

- STAINLESS STEEL CONSTRUCTION IMPROVES CLEANABILITY
 and eliminates corrosion
- 2-HEAD ROTARY CARTON FEEDER ENSURES SMOOTH, efficient operation
- FAST, EASY CHANGEOVER WITH SCREW ADJUSTABLE overheads maximizes productivity
- COMPACT FRAME WITH LEVELING FEET AND CASTERS SAVES
 space and maximize portability
- LARGE CARTON SIZE RANGE WITH OVERSIZING OPTIONS
 protects your investment as products change
- ERGONOMICALLY-DESIGNED PRODUCT LOAD TABLE minimizes fatigue and maximizes productivity
- ADVANCED GUARD DESIGN KEEPS OPERATORS SAFE AND
 maximizes maintenance access

SPECIFICATIONS

15D105 HAND LOAD CARTONER

Product Features

- STAINLESS STEEL CONSTRUCTION
- COMPACT FRAME WITH LEVELING FEET AND CASTERS
- HIGH CAPACITY, EASY-TO-LOAD CARTON MAGAZINE
- 2-HEAD ROTARY CARTON FEEDER
- ERGONOMICALLY-DESIGNED 6' DUAL STATION PRODUCT load table
- CAPABLE OF ERECTING AND SEALING EITHER TABLOCK STYLE or glued cartons
- NORDSON® PROBLUE HOT MELT GLUE SYSTEM (WHEN glue is specified)
- ALLEN-BRADLEY® CONTROL PACKAGE
- FULLY-INTERLOCKED BARRIER GUARD PACKAGE
- USDA LISTED
- MANY OPTIONS AVAILABLE UPON REQUEST

Typical Applications

- BAG-IN-BOX
- FLOW-WRAPPED BARS
- FROZEN FOOD
- READY MEALS
- PHARMACEUTICALS
- DAIRY PRODUCTS


UTILITIES

Electrical


230/460 VAC, 3-PHASE WITH GROUND (PE), 60 HZ

Air Consumption

10 CFM @ 95 PSI





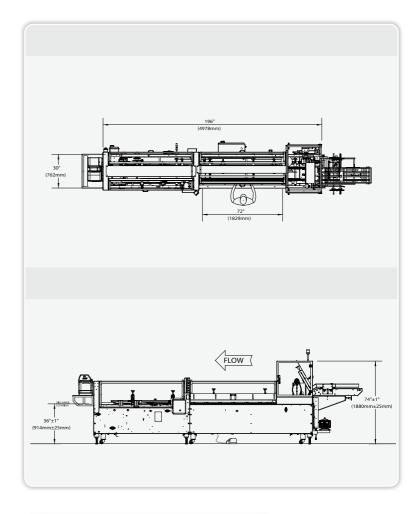





For more information on this product, scan the QR code with your mobile device.





Emrich Industries Pty Ltd





www.emrich.com.au