

**aranorth**



Liquid, Viscous & Pasty

aranorth

**aranow**  
packaging  
machinery

# aranorth


Single - Serve Packaging Solutions

StickPack MULTILANES MACHINE High Speed!



## Liquid, Viscous & Pasty

industries food + beverages + pharmaceuticals + cosmetics + detergents

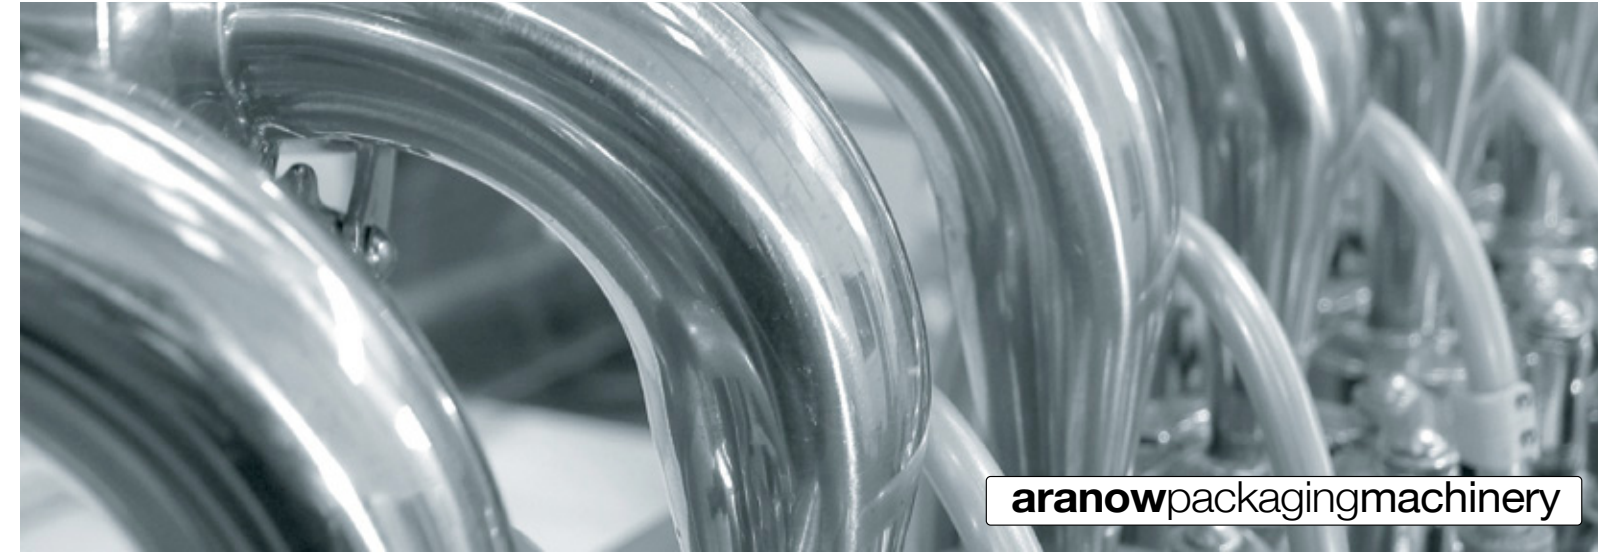

### main characteristics

- Touch screen
- Pressurized and heated hopper
- Total hermetic and monobloc machine, easy accessibility without corners for easy cleaning
- CIP system
- Frame in stainless steel
- Expanding reel shaft
- Covered unwinder, motorized with security protections.
- Photocell automatic correction of impression
- Production counter
- Tip-up vertical jaws
- Stick presence control per dosing
- Automatic stickpack length change
- Vertical folding and independent jaws
- Temperature adjustment by the touch screen
- Automatic reel alignment
- Automatic photocell adjustment
- All parts in contact with the product in aisi-316l
- Ethernet communication


### optional equipment

- Product elevator
- Checkweigher
- Reel-joint detector
- Tear notch
- Straight cut
- Coders
- Metal detectors
- Distributor discharge belt
- Grouping and counting unit
- Cartoning transference
- End of line equipment
- 21 CFR Part 11
- Protocol DQ/IQ/OQ/PQ

### Dosing system

- Pressurized and heating hopper (security valve included)
- Micronic and submicronic filter
- Membrane valves
- Nozzles with pneumatically closing device, controlled from the touch screen.
- Individual Piston pumps
- Flowmeters



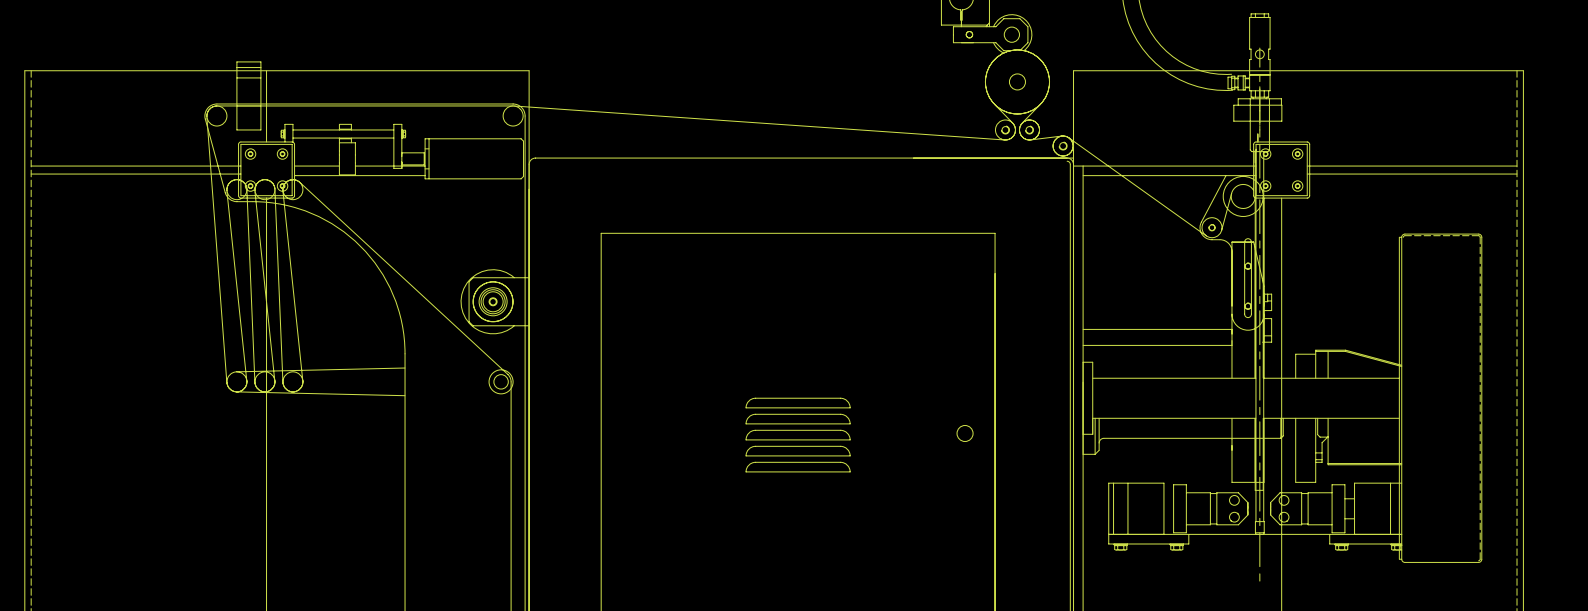

## Technical Details

	4 Lanes	6 Lanes	8 Lanes	10 Lanes	12 Lanes	14 Lanes
Min. StickPack width	17	17	17	17	17	17
Max. StickPack width	56	48	35	26	21	17
Max. StickPack length	180	180	180	180	180	180
Min. StickPack length	30	30	30	30	30	30
Min. Speed production (Stick/min)	120	180	240	300	360	420
Max. Speed production (Stick/min)	320	480	640	800	960	1.120
Reel Shaft (mm)	70/150	70/150	70/150	70/150	70/150	70/150
Ø Reel max.	500mm					
Standard Power consumption	5 kw					
Standard Air consumption (l./min)	220					

Taylor made equipments to meet customer's requirements, up to 25 lanes, 1000 mm.reel width max. End of line equipment also available.



**allyoucanimaginein!**



**[www.aranow.com](http://www.aranow.com)**